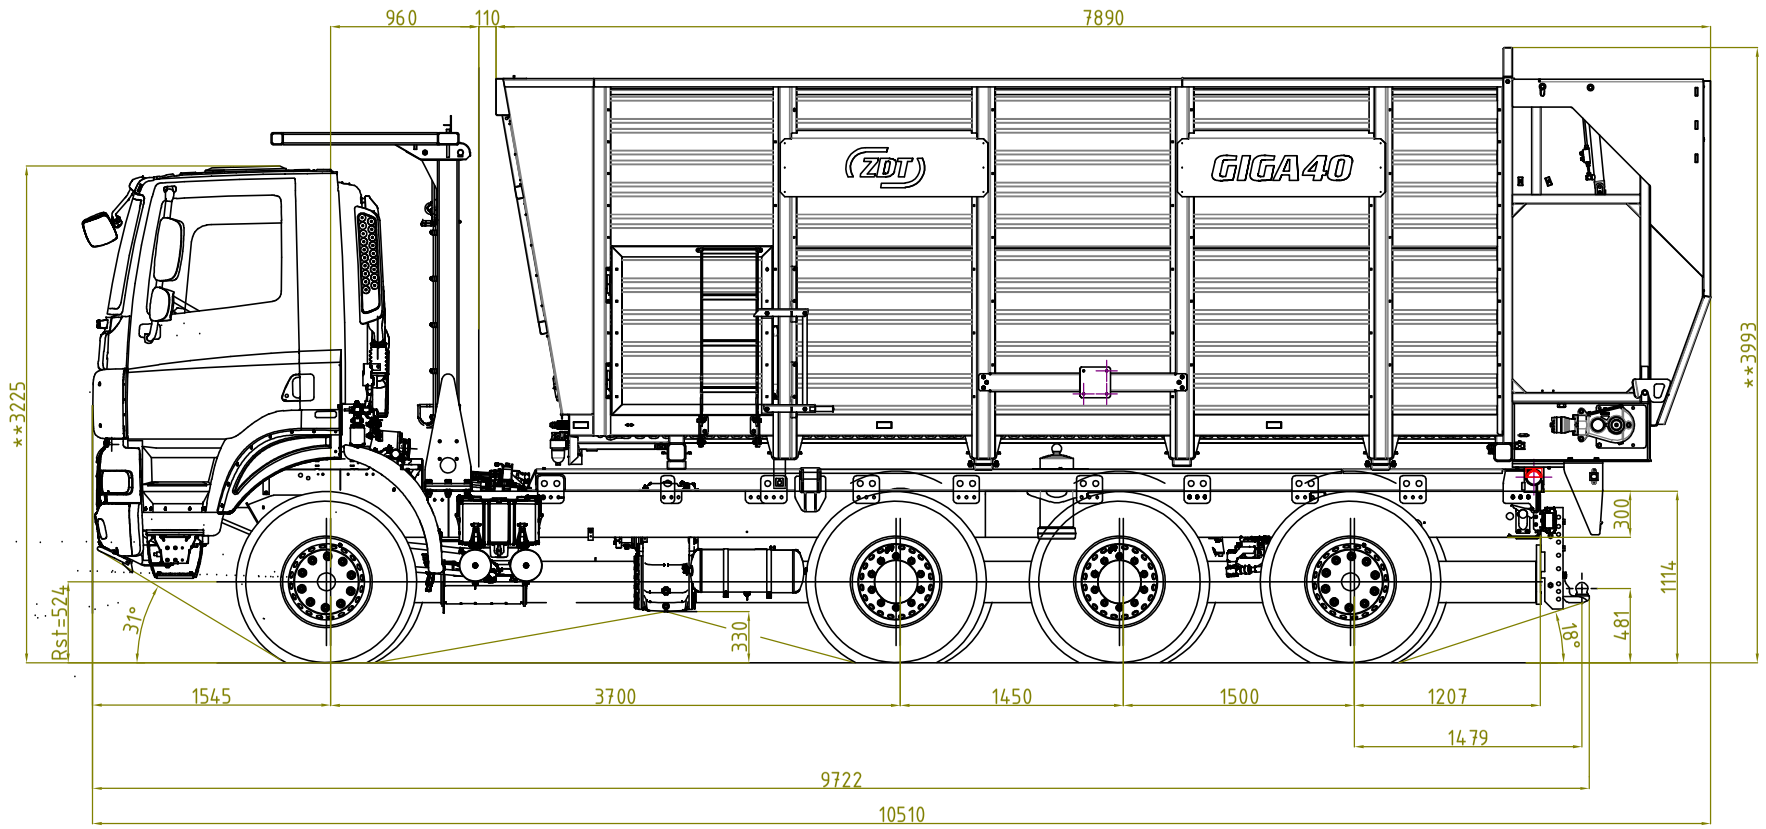

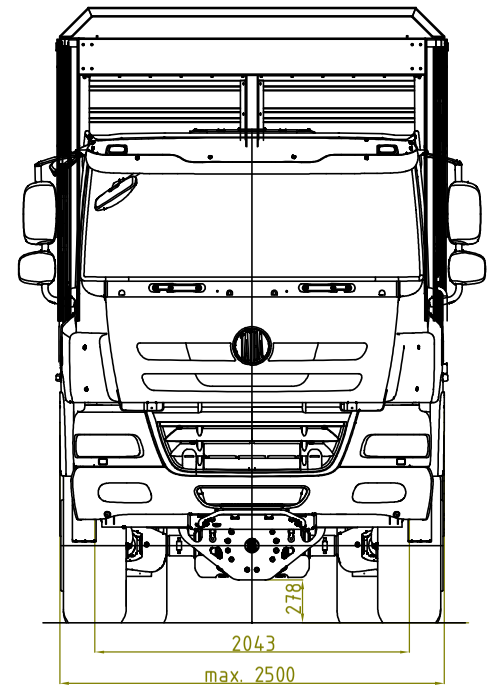

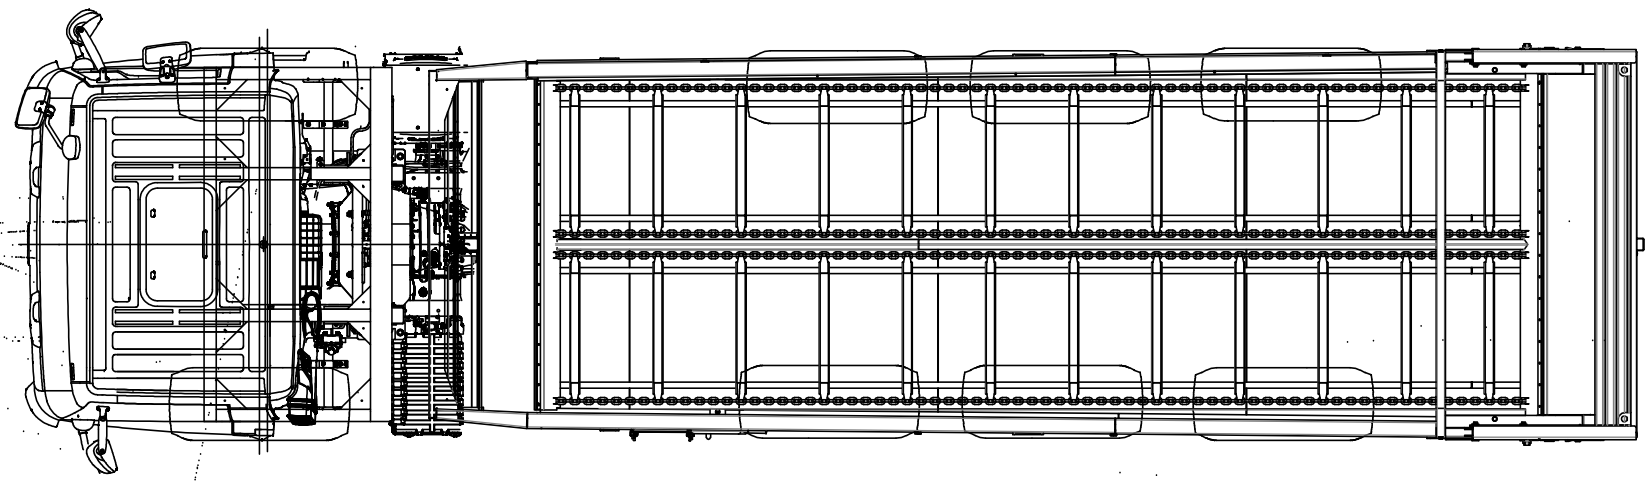

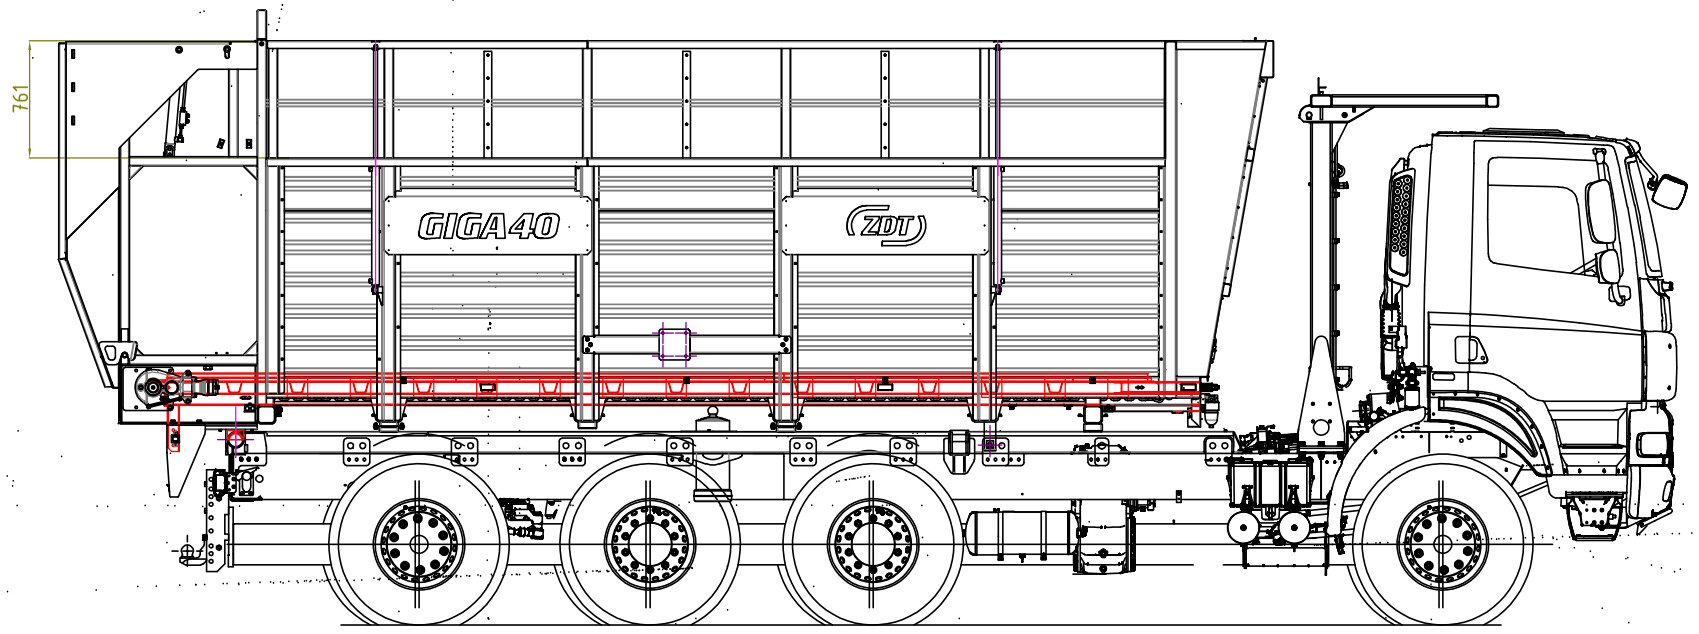

(*) VALUE FOR TYRES PŘEDNÍ 445/65 R22.5, ZADNÍ 600/50 R22.5
(**) VALUE IN DEPEND OF EQUIPMENT AND TYRES

SILLAGE BODY

BASIC OUTSIDE DIMENSIONS	
LENGHT [mm]	7890
WIDTH [mm]	2550
HEIGHT [mm]: BASIC	2160
WITH EXTENSION	-
DIMENSIONS AND PARAMETERS OF BODY FLOOR	
LENGHT [mm].	7750
WIDTH [mm]	2135/2345
BASIC HEIGHT OF SIDES [mm]	2215
HEIGHT OF EXTENSION [mm]	-
BODY VOLUME [m³]: BASIC	40
WITH EXTENSION	-
PLATE THICKNESS FLOOR/ SIDES [mm]	3/0,88
WEIGHTS	
SERVICE (WITH/ WITHOUT EXT.) [kg]	3400

CARRIER WITH BODY

BASIC OUTSIDE DIMENSIONS	
LENGHT [mm]	10510
WIDTH [mm]	2550
HEIGHT [mm]: BASIC (*)	3993
WITH EXTENSION (*)	-
HEIGHT OF BODY FLOOR ABOVE GROUND [mm]	1580
TIPP ANGLE TO BACK/ TO SIDE [°]	-/-
HEIGHT DURING TIPPING [mm]:	
TO BACK (WITHOUT/ WITH EXTENSION) (*)	-
TO SIDE (WITHOUT/ WITH EXTENSION) (*)	-
WEIGHTS	
SERVICE (WITH/ WITHOUT EXT.) [kg] (**)	16170
PAYLOAD (WITH/ WITHOUT EXT.) [kg] (**)	20830
HIGHEST ALLOWED/ TECHNICAL PERMISSIBLE [kg]	37000
MAX. DRAWBAR LOAD [kg]	-

DRAWED: ING. PIKULA CONTROLLED: ING. PIKULA

DATE: 31.01.2018.

PRODUCT: SILLAGE BODY

TYPE NAME: V040

COMMERCIAL NAME: GIGA40

REVISON: